


All Purpose Masonry Screws

- Self tapping screw with serrated thread - easy to use fixing that does not require plastic plugs
- Higher resistance to fire than nylon fixings
- Friction fixing by screwing - prevents stress in the base material, allows fixings near to the edge, prevents deformation of the frame and gives greater loading performance than most nylon fixings

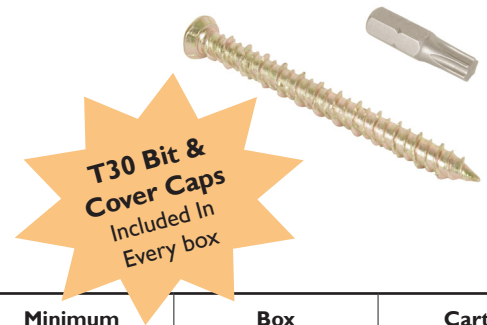

Code	Size	Drill Hole Diameter	Maximum Fixture Thickness	Minimum Hole Depth	Box Quantity	Carton Quantity
MVFMS75040	7.5mm x 42mm	6mm	-	45mm	100	1000
MVFMS75050	7.5mm x 52mm	6mm	10mm	45mm	100	1000
MVFMS75060	7.5mm x 62mm	6mm	20mm	45mm	100	1000
MVFMS75070	7.5mm x 72mm	6mm	30mm	45mm	100	1000
MVFMS75080	7.5mm x 82mm	6mm	40mm	45mm	100	1000
MVFMS75090	7.5mm x 92mm	6mm	50mm	45mm	100	1000
MVFMS75100	7.5mm x 102mm	6mm	60mm	45mm	100	800
MVFMS75110	7.5mm x 112mm	6mm	70mm	45mm	100	800
MVFMS75120	7.5mm x 122mm	6mm	80mm	45mm	100	700
MVFMS75130	7.5mm x 132mm	6mm	90mm	45mm	100	600
MVFMS75150	7.5mm x 152mm	6mm	110mm	45mm	100	600
MVFMS75180	7.5mm x 182mm	6mm	140mm	45mm	100	500
MVFMS75200	7.5mm x 202mm	6mm	160mm	45mm	100	400
MVFMST30	T30 Screwdriver Bits				20	-

Light Duty Masonry Screws

- Medium duty, self-tapping, countersunk head fixing for use in brickwork, blockwork, stone and concrete
- Ideal for fixing wooden battens, window and door frames, brackets and metal profiles
- Standard cross head recess



Code	Size	Drill Hole Diameter	Maximum Fixture Thickness	Minimum Hole Depth	Box Quantity
MTC36032	3/16" x 32mm	4.3mm	2mm	30mm	100
MTC36057	3/16" x 57mm	4.3mm	27mm	30mm	100
MTC36070	3/16" x 70mm	4.3mm	40mm	30mm	100
MTC36082	3/16" x 82mm	4.3mm	52mm	30mm	100
MTC36100	3/16" x 100mm	4.3mm	70mm	30mm	100

Masonry Screw Installation Instructions

1. Drill at right angles using drill bit of same diameter and ensuring hole is slightly deeper than the screw and the fixture combined
2. Remove any loose dust from the hole
3. Screw in the masonry screw with an appropriate driver
4. Tighten the screw until the fixture is in place

